

Christian Brothers Automotive



Owned & Operated By:
Norman & Sue Meyer

350 NW John Jones Drive
Burleson, TX 76028
254-627-0489

Developer

Main Carr Development, LLC
Irving, Texas 75038

General Contractor

EBCO General Contractor, LTD.
Cameron, Texas 76520

Burleson, Texas (February 2010)



Burleson is a city spanning Johnson and Tarrant Counties in Texas. It is a suburb of Fort Worth and is recognized as the third fastest-growing community in Tarrant County with a growth rate of 13.79%. Burleson is named for Rufus C. Burleson, a former President of Baylor University at Waco, and was incorporated in 1912. Burleson has two major rail lines (the Union Pacific and Burlington Northern Santa Fe), that serve the city, as well as Spinks General Aviation Airport just north of Burleson.

Panoramic view of building

Shop at time of arrival

Diamond grinding

Surface Preparation Complete

Scope Sequencing

█	█
█	█
█	█
█	█
█	█
█	█
█	█
█	█
█	█
█	█

Beginning of Flooring Installation

Christian Brothers Automotive



Owned & Operated By:
Norman & Sue Meyer

350 NW John Jones Drive
Burleson, TX 76028
254-627-0489

Developer

Main Carr Development, LLC
Irving, Texas 75038


General Contractor

EBCO General Contractor, LTD.
Cameron, Texas 76520

Photographs of Drain Repair

	<p>REDFORD Corporation</p> <p>Crack Filler E31-1204</p> <p>1075 Kingswood Drive • Kingswood, Texas 77339 • (281) 358-4100</p> <p>Instructions for use For best results, apply over a dry, warm surface. If exposed to the elements, do not apply within 24 hours of forecast rain or if the ambient air temperature is expected to fall below 50° F (10° C).</p> <p>Preparation Remove all contaminants, such as dirt, dust and other loose material with high pressure water, steam, strong detergents, or acid etching. Use compressed air or long drying times to insure that all cracks are thoroughly dry.</p> <p>Application</p> <ul style="list-style-type: none"> Use a 6" to 12" taping knife to mix equal parts of A and B in a plastic paint tray or similar container; mix uniform consistency in amount. Cover containers immediately after opening. Use the same method to fill cracks, scraping off the excess. Limit traffic flow on the filled areas during the 12 to 24 hours curing time. The filler must cure for a minimum of 4 hours before covering with epoxy or urethane coatings. Use all mixed material within 15 to 20 minutes of mixing. Cleanup with xylene, MEK, or acetone. <p>Curing time Depending on ambient temperatures, the filled crack will dry to touch in about 8 hours. Allow 12 to 24 hours of cure time before sanding.</p>	

Burleson, Texas - Temperature & Humidity Graphs

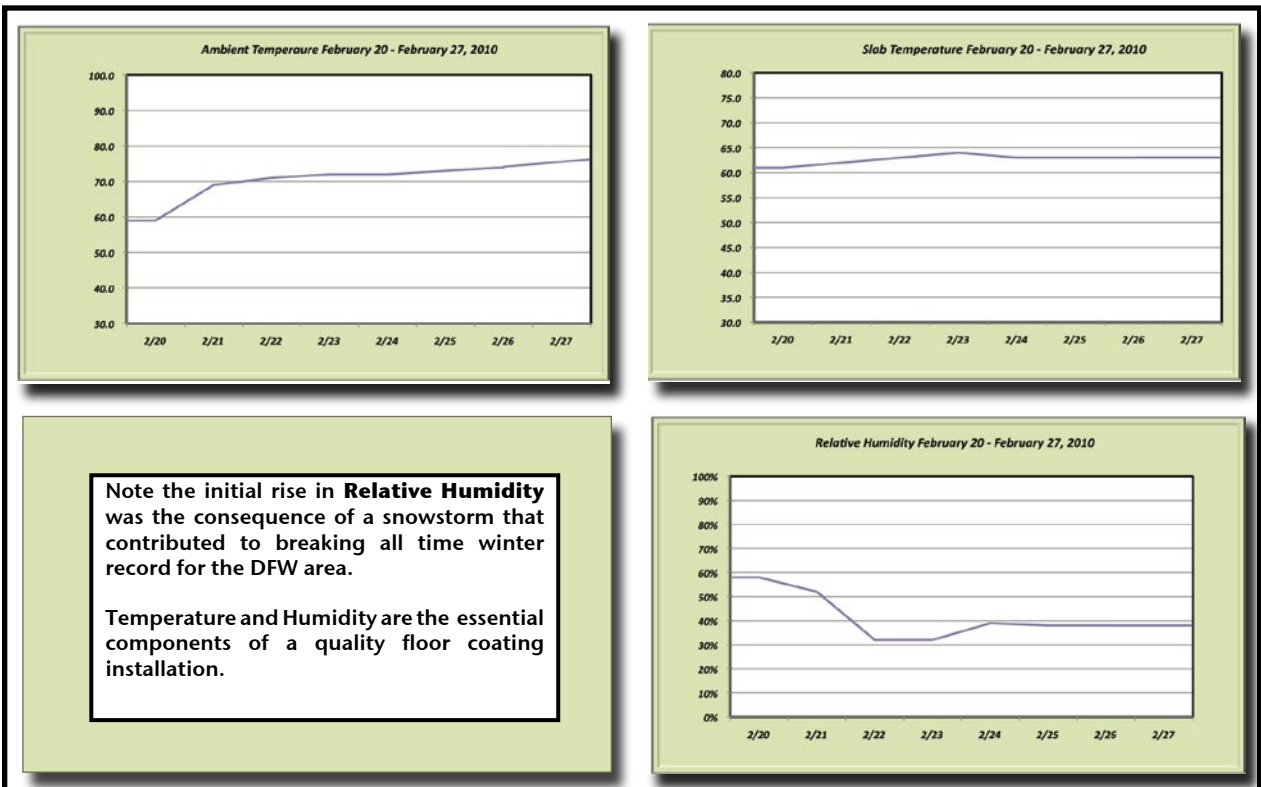

Christian Brothers Automotive



Owned & Operated By:
Norman & Sue Meyer

350 NW John Jones Drive
Burleson, TX 76028
254-627-0489



Developer

Main Carr Development, LLC
Irving, Texas 75038

General Contractor



EBCO General Contractor, LTD.
Cameron, Texas 76520

Concrete Primer Application - Wednesday



REDFORD Corporation	
Product Name	Concrete Primer
Product Code	CP-100
Manufacturer	Redford Corporation
Material Type	Concrete Primer
Application Method	Roller
Surface Preparation	Concrete must be clean, dry, and free of oil.
Temperature	Apply at 50°F to 90°F.
Coat Weight	1.0 to 1.5 lbs per sq. ft.
Drying Time	24 hours to touch, 72 hours to cure.
Notes	Use roller for application.

Application of E31-1202 (100% Epoxy Overlayment) - Thursday

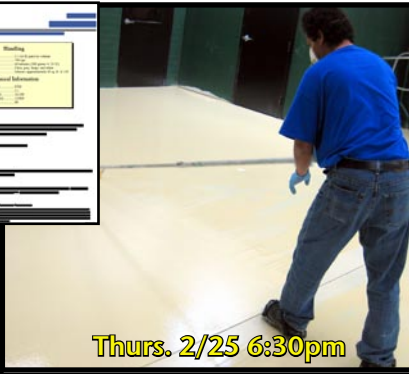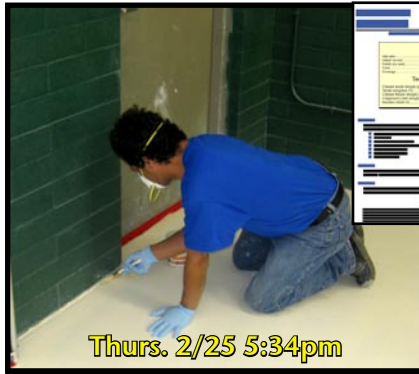

REDFORD Corporation	
Product Name	E31-1202
Product Code	E31-1202
Manufacturer	Redford Corporation
Material Type	100% Epoxy Overlayment
Application Method	Roller
Surface Preparation	Concrete must be clean, dry, and free of oil.
Temperature	Apply at 50°F to 90°F.
Coat Weight	1.0 to 1.5 lbs per sq. ft.
Drying Time	24 hours to touch, 72 hours to cure.
Notes	Use roller for application.

Application of U31-1201 High Performance Urethane - Friday



REDFORD Corporation	
Product Name	U31-1201
Product Code	U31-1201
Manufacturer	Redford Corporation
Material Type	High Performance Urethane
Application Method	Roller
Surface Preparation	Concrete must be clean, dry, and free of oil.
Temperature	Apply at 50°F to 90°F.
Coat Weight	1.0 to 1.5 lbs per sq. ft.
Drying Time	24 hours to touch, 72 hours to cure.
Notes	Use roller for application.



Christian Brothers Automotive



Owned & Operated By:
Norman & Sue Meyer

350 NW John Jones Drive
Burleson, TX 76028
254-627-0489

Developer

Main Carr Development, LLC
Irving, Texas 75038

General Contractor

EBCO General Contractor, LTD.
Cameron, Texas 76520

Installation of Green Pads - Saturday



Sat. 2/27 8:00am



Sun. 2/28 8:54am



Sun. 2/28 8:55am



Sun. 2/28 9:50am

Installation of Second Green Pad Coat - Sunday



Sun. 2/28 9:51am



Sun. 2/28 10:16am



Sun. 2/28 12:16pm

Final Day - Cure/Cleanup Complete - Correcting "Bleed Through" - Sunday



Sun. 2/28 1:21pm



Sun. 2/28 1:37pm

Christian Brothers Automotive



Owned & Operated By:
Norman & Sue Meyer

350 NW John Jones Drive
Burleson, TX 76028
254-627-0489

Developer

Main Carr Development, LLC
Irving, Texas 75038

General Contractor

EBCO General Contractor, LTD.
Cameron, Texas 76520

