



Southern Company Services, Inc.
Aviation Department (PDK)
Atlanta, Georgia




Southern Company at a Glance:

With 4.4 million customers and more than 42,000 megawatts of generating capacity, Atlanta-based Southern Company is the premier energy company serving the Southeast.

A leading U.S. producer of electricity, Southern Company owns electric utilities in four states and a growing competitive generation company, as well as fiber optics and wireless communications. Southern Company brands are known for excellent customer service, high reliability and retail electric prices that are significantly below the national average.

Southern Company has been listed the top ranking U.S. electric service provider in customer satisfaction for nine consecutive years by the American Customer Satisfaction Index.

Management Company for
Aviation Hangar:
Carter & Associates, L.L.C.
Atlanta, Georgia

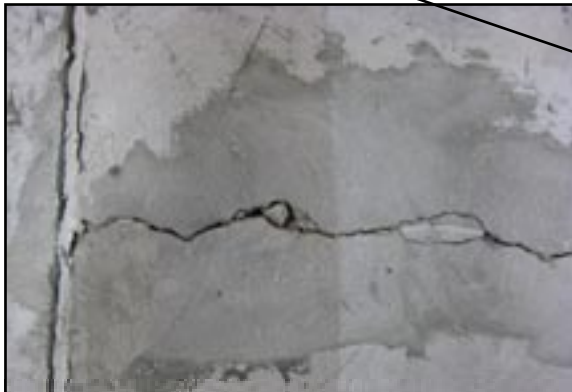

Project started in December 2009: This approximate 21,000 square foot hangar was coated over 20 years ago and showed normal "wear and tear" (minor peeling, cracks, and spalled concrete). For the numerous shrinkage and settlement cracks, we started the floor process by diamond grinding those to bare concrete, cleaning, and filling with E31-1204. The floor was then diamond ground/power sanded and detergent cleaned. The settlement / shrinkage cracks and caulking were repaired initially (to prevent water accumulation in the concrete voids).




Conditions at Project Start



Southern Company Services, Inc.
Aviation Department (PDK)
Atlanta, Georgia


Floor diamond ground / power sanded / E31-1204 applied / primed with E31-1203.

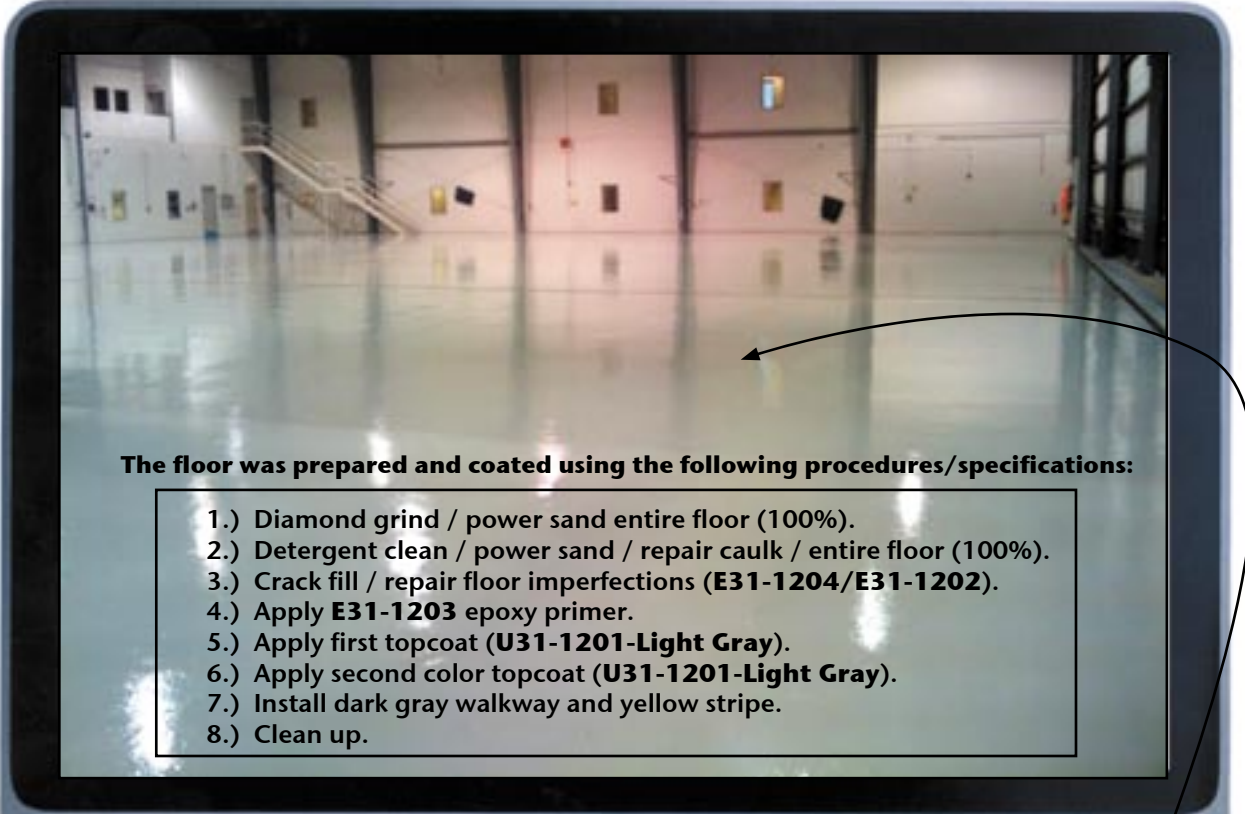

The floor was prepared and coated using the following procedures/specifications:

- 1.) Diamond grind / power sand entire floor (100%).
- 2.) Detergent clean / power sand / repair caulk / entire floor (100%).
- 3.) Crack fill / repair floor imperfections (E31-1204/E31-1202).
- 4.) Apply E31-1203 epoxy primer.
- 5.) Apply first topcoat (U31-1201-Light Gray).
- 6.) Apply second color topcoat (U31-1201-Light Gray).
- 7.) Install dark gray walkway and yellow stripe.
- 8.) Clean up.

The photographs on the following pages show the procedures/specifications step-by-step.

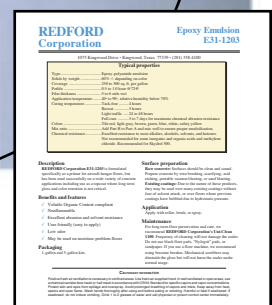



Southern Company Services, Inc.
 Aviation Department (PDK)
 Atlanta, Georgia




REDFORD Corporation		U31-1201 Linear Urethane												
<p>Description: REDFORD Corporation U31-1201 Linear Urethane is a high performance, single component, water based urethane floor coating. It is designed for use on concrete and masonry surfaces. It provides a durable, slip resistant, and easy to clean finish. It is available in a variety of colors and finishes.</p>														
<p>Features and Benefits:</p> <ul style="list-style-type: none"> • High performance, single component, water based urethane floor coating. • Provides a durable, slip resistant, and easy to clean finish. • Available in a variety of colors and finishes. • Easy to apply and maintain. 														
<p>Applications: Industrial floors, warehouse floors, parking garage floors, and other high traffic areas.</p>														
<p>Notes: See the full technical data sheet for more information. For a complete list of products and services, please visit our website at www.redfordcorp.com.</p>														
<p>Typical Properties</p> <table border="1"> <tr> <td>Color</td> <td>White</td> </tr> <tr> <td>Finish</td> <td>Matte</td> </tr> <tr> <td>Application Method</td> <td>Roller, Trowel, or Spray</td> </tr> <tr> <td>Drying Time</td> <td>2-4 hours</td> </tr> <tr> <td>Recoat Time</td> <td>24 hours</td> </tr> <tr> <td>Life Expectancy</td> <td>5-10 years</td> </tr> </table>		Color	White	Finish	Matte	Application Method	Roller, Trowel, or Spray	Drying Time	2-4 hours	Recoat Time	24 hours	Life Expectancy	5-10 years	<p>Notes: See the full technical data sheet for more information. For a complete list of products and services, please visit our website at www.redfordcorp.com.</p>
Color	White													
Finish	Matte													
Application Method	Roller, Trowel, or Spray													
Drying Time	2-4 hours													
Recoat Time	24 hours													
Life Expectancy	5-10 years													

REDFORD Corporation		Epoxy Emulsion E31-1203												
<p>Description: REDFORD Corporation E31-1203 Epoxy Emulsion is a high performance, two component, epoxy floor coating. It is designed for use on concrete and masonry surfaces. It provides a durable, slip resistant, and easy to clean finish. It is available in a variety of colors and finishes.</p>														
<p>Features and Benefits:</p> <ul style="list-style-type: none"> • High performance, two component, epoxy floor coating. • Provides a durable, slip resistant, and easy to clean finish. • Available in a variety of colors and finishes. • Easy to apply and maintain. 														
<p>Applications: Industrial floors, warehouse floors, parking garage floors, and other high traffic areas.</p>														
<p>Notes: See the full technical data sheet for more information. For a complete list of products and services, please visit our website at www.redfordcorp.com.</p>														
<p>Typical Properties</p> <table border="1"> <tr> <td>Color</td> <td>White</td> </tr> <tr> <td>Finish</td> <td>Matte</td> </tr> <tr> <td>Application Method</td> <td>Roller, Trowel, or Spray</td> </tr> <tr> <td>Drying Time</td> <td>2-4 hours</td> </tr> <tr> <td>Recoat Time</td> <td>24 hours</td> </tr> <tr> <td>Life Expectancy</td> <td>5-10 years</td> </tr> </table>		Color	White	Finish	Matte	Application Method	Roller, Trowel, or Spray	Drying Time	2-4 hours	Recoat Time	24 hours	Life Expectancy	5-10 years	<p>Notes: See the full technical data sheet for more information. For a complete list of products and services, please visit our website at www.redfordcorp.com.</p>
Color	White													
Finish	Matte													
Application Method	Roller, Trowel, or Spray													
Drying Time	2-4 hours													
Recoat Time	24 hours													
Life Expectancy	5-10 years													

First application of **U31-1201** High Performance Urethane over **E31-1203**.



Southern Company Services, Inc.
Aviation Department (PDK)
Atlanta, Georgia

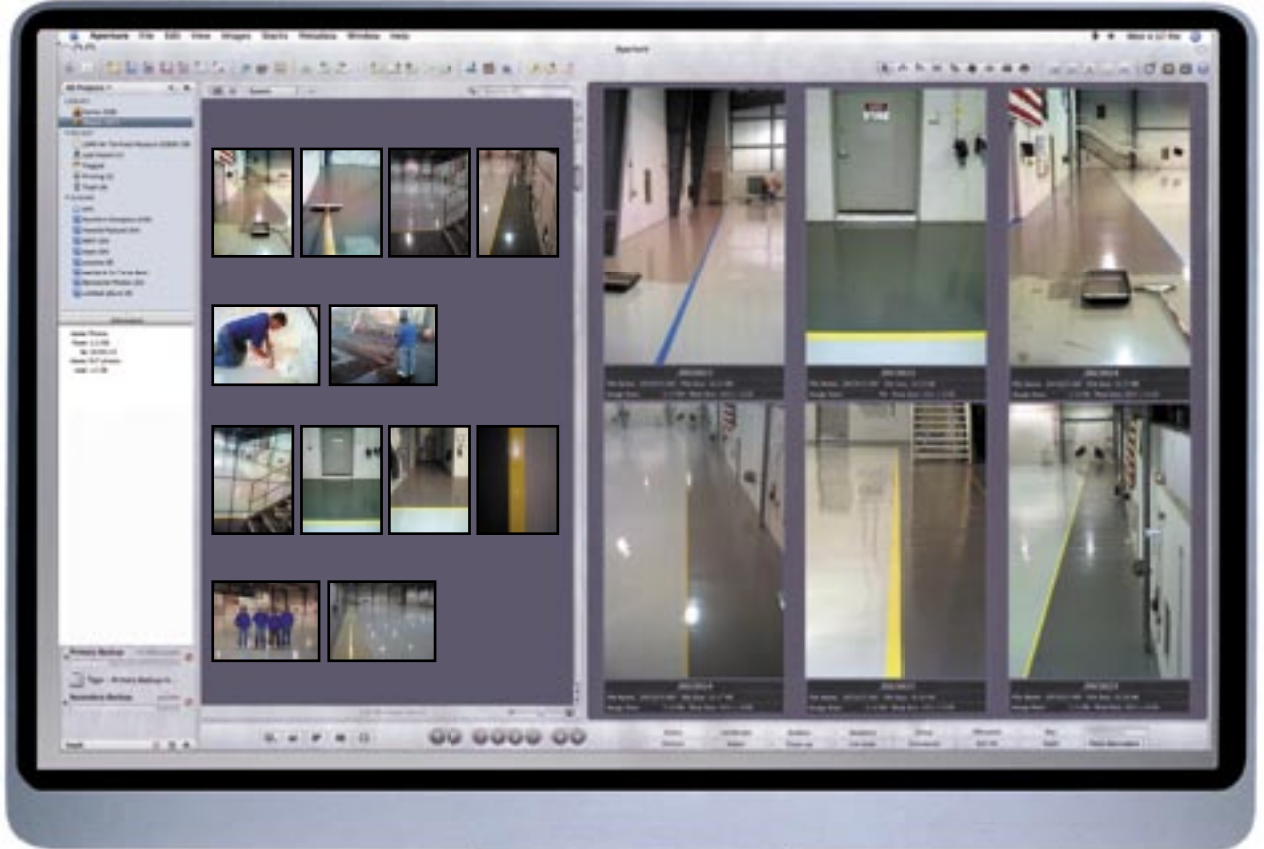

Dark Gray Walkway / Yellow Stripe Installed / 2nd Topcoat of U31-1201 High Performance Urethane Applied (Light Gray).



Southern Company Services, Inc.
Aviation Department (PDK)
Atlanta, Georgia

